




.50 B&M ALASKAN

WILDCAT CARTRIDGES by Layne Simpson

Some time during the 1950s gunsmith Harold Johnson, who owned a shop in Cooper Landing Alaska called Johnson's Kenai Rifles, decided to create a rifle and cartridge combination that would be ideal for back-up use by guides who were tasked with preventing clientele from being eaten by a brown bear or gored by a bull moose. His small advertisement in *American Rifleman* (May 1955, page 83) read: "The .450 Alaskan is the most powerful lever action made. Light, fast and handy, it is used from Alaska to Africa by hunters, guides and photographers. Uses .348 Winchester case with 400-grain, .457-inch bullet at 2,100 fps. New rifle on Winchester Model 71 action for \$185 or \$85 on your Model 71 action."

Johnson later acquired a Winchester Model 86 .50-110 with a

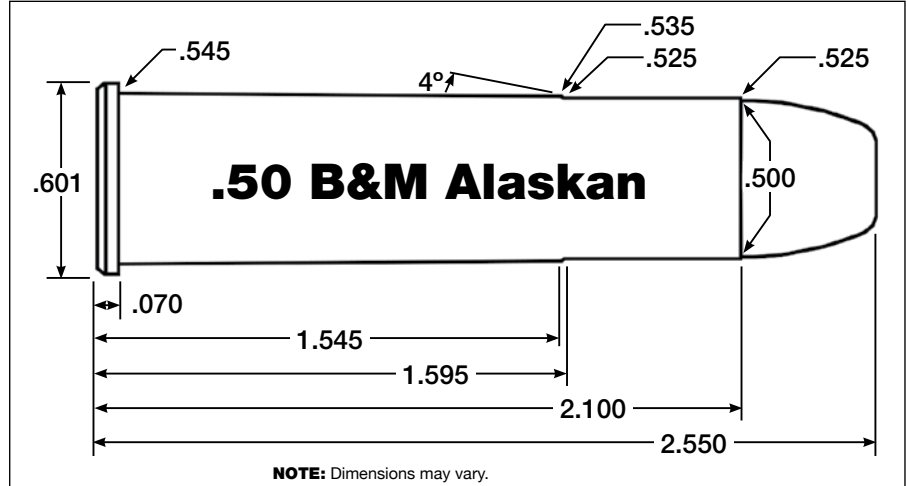


rusted-out bore and decided to make a replacement for it from a military-surplus .50 BMG machine gun barrel. But rather than chamber the barrel for the Winchester cartridge, he necked up the .450 Alaskan case to .50 caliber. Lacking a jacketed bullet for his new cartridge, he whittled away at the 750-grain .50 BMG boat-tail bullet until it weighed 450 grains. When shooting his homemade projectile seated in a case base-forward, Johnson claimed it would zip clean through a moose or a bear from any angle. He usually referred to the cartridge as "the .50" and carried it while guiding RCBS founder, Fred Huntington, and other hunters. The cartridge eventually became commonly known as the .50 Alaskan.

Fast-forward about 60 years and we have the introduction of the .50 B&M Alaskan by Michael McCourry (the "B" is for his friend

William Bruton). It is but one of about a dozen of his wildcats in calibers ranging from 9.3mm to .50. Some are on the Remington Ultra Mag case, others are on the Winchester Short Magnum (WSM) case. Rather than simply design a new cartridge and leave it at that, McCourry heads to points around the globe for tests on various game ranging from Asiatic buffalo in Australia to elephant and Cape buffalo in Africa. And rather than guesstimating chamber pressures, he has his own pressure-testing equipment at an indoor range. He also designs bullets for his cartridges, and a recovery box allows testing them for expansion and penetration prior to heading to the field.

The original .50 Alaskan was made by necking up the .348 Winchester case and fireforming to minimum body taper. Doing so remains an option, but Starline

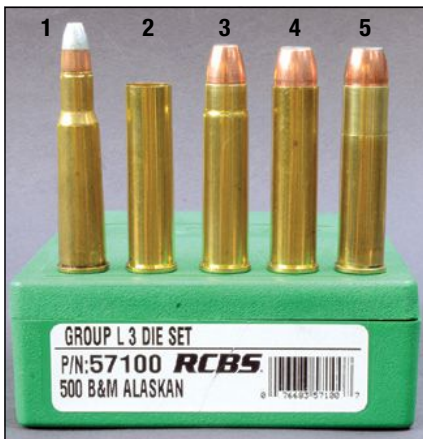

Cartridges shown include a (1) .348 Winchester, a (2) Starline .50 Alaskan case, a (3) .450 Alaskan, a (4) .50 Alaskan and a (5) .50 B&M Alaskan.



The SSK Marlin .50 B&M Alaskan test rifle features after-market sights, a McGowen barrel and a Weaver V3 1-3x scope in a T'SOB mounting base.



Using a Corbin CSP-1 press to push the Swift .510-inch, 450-grain A-Frame through an annular draw die decreases its diameter to .500 inch for the .50 B&M Alaskan.

eliminates the chore by offering fully formed cases. Bullet diameter for Harold Johnson's cartridge is .510 inch, whereas Michael McCourry went with .500 inch, which just happens to be the diameter of bullets made for the .500 S&W Magnum. One trip through an RCBS .50 B&M Alaskan full-length resizing die squeezes down the mouth of the Starline case for the smaller-diameter bullet.

Only a few .510-inch bullets of the correct weight and style for the .50 Alaskan are available while .500-inch bullets are quite common. Using the slightly skinnier bullet increases the versatility of the original .50 Alaskan concept. As far as I know, the Swift 450-grain A-Frame is the lightest .510-inch bullet available for the .50 Alaskan, and while it would be an excellent big bear stopper, it is a bit heavily constructed for quick



Running a Starline .50 Alaskan case (left) into an RCBS .50 B&M Alaskan full-length resizing die (center) necks it down for a .500-inch bullet (right).



Pristine bullets and those recovered from expansion test media at 50-yard impact velocities include (left to right): a Swift 325-grain A-Frame, a North Fork 450 Bonded SP and a Swift 450 A-Frame.

expansion on deer-size game. In regard to .500-inch bullets, and while heavier bullets of this diameter are available for the big stuff, lighter (and softer) bullets are better for use on deer, black bear and such. McCourry's favorites for deer are the Hornady 300-grain FTX and the Sierra 400-grain JSP.

It is important to note that when pushed to maximum .50 B&M velocities, most bullets designed specifically for the .500 S&W Magnum are too soft for adequate penetra-

tion on heavier game. This especially holds true inside 50 yards, where velocities are still high. Stouter bullets suitable for use on bigger game are available.

Cutting Edge 300-, 335- and 375-grain, deep-cavity Lever Gun bullets included in the accompanying table were designed by McCourry and are available from Cutting Edge. He is especially fond of the heaviest version, but due to the position of its crimp groove,

(Continued on page 63)

.50 B&M Alaskan Handloads

bullet (grains)	powder	charge (grains)	velocity (fps)	50-yard 3-shot group average (inches)
SSK Industries custom Marlin New Model 1895, 22-inch barrel, 1:20 twist				
300 Cutting Edge Lever Gun CN	IMR-4198	68.0	2,444	1.30
300 Hornady FTX ⁽¹⁾	IMR-4198	67.0	2,428	1.08
325 Swift A-Frame	RL-7	66.0	2,251	.73
335 Cutting Edge Lever Gun CN	IMR-4198	65.0	2,331	.82
350 Speer Deep Curl	RL-7	65.0	2,059	.94
375 Cutting Edge Lever Gun CN ⁽²⁾	RL-7	64.0	2,087	.81
400 Sierra JSP-SM	H-4198	63.0	2,113	.79
	IMR-4198	40.0	1,334	1.11
400 RCBS 82099 cast ⁽³⁾	IMR-4198	50.0	1,986	1.21
405 Cutting Edge Lever Gun Solid	IMR-4198	61.0	2,138	1.14
450 Swift A-Frame ⁽⁴⁾	RL-7	58.0	1,827	.86
450 North Fork Bonded SP	H-322	62.0	1,966	1.10
	H-4198	56.0	1,970	1.18
500 Hornady XTP FP	RL-10X	62.0	1,947	1.27
500 Woodleigh Weldcore ⁽⁴⁾	IMR-4198	56.0	1,902	.91
SSK custom Ruger No. 1, 20-inch barrel, 1:12 twist *				
410 Cutting Edge Raptor HP	IMR-4198	65.0	2,198	n/a
450 Cutting Edge Safari Solid	IMR-4198	64.0	2,122	n/a
450 Northfork Bonded SP	IMR-4198	65.0	2,203	n/a
500 Hornady FP-XTP	IMR-4198	62.0	2,027	n/a
* Not for lever-action rifles				
⁽¹⁾ Shorten case to 1.97 inches for this bullet; cartridge length not to exceed 2.55 inches.				
⁽²⁾ For Winchester/Browning only (see text)				
⁽³⁾ Actual weight cast from scrap wheel weights is 408 grains				
⁽⁴⁾ Diameter reduced to .500 inch with Corbin draw die				
Notes: All powder charges were pressure-tested by the cartridge designer, Michael McCourry. All charges are maximum, or close to it, and starting loads should be reduced by 10 percent. Velocities are the average of five shots chronographed 12 feet from the muzzle with a Oehler 33 chronograph. Starline .50 Alaskan cases and Federal 210M primers used in all loads.				
<i>Be Alert - Publisher cannot accept responsibility for errors in published load data. Listed loads are only valid in the test firearms used. Reduce initial powder charge by 10 percent and work up while watching for pressure signs.</i>				

Wildcat Cartridges

(Continued from page 29)

overall cartridge length is too long for the Marlin action to handle. Winchester and Browning Model 71 rifles accept slightly longer cartridges, so it works fine in them. With a wide flat on its nose, the monolithic Cutting Edge 405-grain Lever Gun Solid may be the only available tube magazine-friendly bullet of its type. Exiting the 18-inch barrel of a Browning 71 at 2,175 fps, it has proven to be quite effective on big stuff, including Cape buffalo.

Another preference for use on heavy game is the 450-grain North Fork, with its bonded lead core. The Swift 350-grain A-Frame really hammers huge Vancouver Island black bears. I wanted to try the Swift 450-grain A-Frame and the Woodleigh 500-grain Weld-core in my rifle, but they are .510-inch bullets. Dave Corbin came to the rescue with an annular draw die for my CSP-1 press. In goes a .510-inch bullet and out comes a .500-inch bullet.

As powders go, IMR-4198 seems to do it all. The cartridge does have some recoil, so loading 40.0 grains behind any bullet weighing from 300 to 500 grains results in an excellent reduced-velocity load. Shooting the RCBS .500-400-SWC or Lyman No. 501680 bullet cast of scrap wheel weights saves money during practice sessions. Moving to the opposite extreme in velocity and power, no other powder beats IMR-4198.

The first .50 B&M Alaskan rifles I shot belonged to McCourry and were built by SSK Industries on Marlin New Model 1895 and Browning Model 71 actions. Both had 18-inch Pac-Nor barrels. My Marlin was also built by SSK, and its 22-inch barrel was made by McGowen Precision Barrels in Kalispell, Montana. It has a 1:20 twist and a muzzle diameter of .795 inch compared to .725 inch for the .45-70 barrel it replaced. Depending on the powder/bullet combination, velocity difference between it and an 18-inch barrel ranges from just a tad to upward of 75

fps. More important than a small increase in velocity is the reduction in muzzle blast from a longer barrel. Making the big cartridge flow smoothly through the Marlin action requires talent, and the guys at SSK obviously are blessed with an abundance of it.

It rains a lot in Alaska, so for the conversion I chose a Model 1895 MLXR with laminated wood stock and stainless steel barreled action. The barrel features Masterpiece open sights from N.E.C.G., a No. 61 Adjustable at the rear and a No. 661 Banded Ramp up front. The front sight is the S-4 version, and in addition to a fixed $\frac{3}{32}$ -inch silver bead it has a larger $\frac{1}{64}$ -inch white bead that can be hinged up and in front of the smaller bead when light is bad, or folded down when not needed. British rifle builders call it a "night sight," and the folding bead is often made from the tusk of a warthog because it does not turn yellow with age as elephant ivory is prone to do.


The .50 B&M Alaskan shoots flat enough for shots on game out to about 150 yards, but it is seen at its best as a close-range stopper. For that, a scope with a wide field of view is needed, and after trying several I settled on a Weaver V3 1-3x with a 22-foot field of view at 25 yards. An indestructible T'SOB

scope mounting base installed by SSK holds Maxima quick-detach rings from Warne. Total weight is 8.75 pounds. It was used to shoot most of the loads included in this column. The Ruger No. 1 loads were shot by Michael McCourry. ●


The Difference Between,



And,



Is This.



TIMNEY TRIGGERS

www.timneytriggers.com

866-484-6639

2020 W. Quail Avenue - Dept. HL
Phoenix, AZ 85027



Only \$39.95

Introducing the GRX Recoil Lug for the Ruger 10/22™!

The GRX solves the chronic accuracy problem with the 10/22 platform by focusing the recoil area to a lug similar to a centerfire rifle.

- Eliminates fliers and improves accuracy 15% to 20%
- Simply installed by replacing the barrel retainer, fitting and bedding the lug into the stock (instructions included)

Little Crow Gunworks, LLC
6593 113th Ave. NE, Suite C • Spicer, MN 56288
Tel: (320) 796-0530 • www.littlecrowgunworks.com